

Unit : Millimeter[inch]

### Spring force

17.30g(0.610oz) at initial travel

30.90g(1.090oz) at 0.75mm(0.0295) recommended travel

34.10g(1.203oz) at 0.95mm(0.0374) full travel

### Material & Finish

Plunger	Hardened Beryllium copper	/ Gold Plated
Barrel	Brass	/ Gold Plated
Spring	Music Wire	/ Gold Plated

### HEAD OFFICE



1547-3, Songjung-Dong, Gangseo-Gu, Busan, Korea

TEL : +82-51-831-3232 +82-51-831-5897(Overseas Dept)



FAX: +82-51-831-3233 <http://www.leeno.co.kr>

### Electrical Spec.

Current Rating	: 2.0A Continuous
Probe Resistance	: Less than 50mohm
Inductance	: 1.67nH ~ 3.0nH @ 30MHz to 4.5GHz
Bandwidth	: 6GHz @ -0.58dB (Dielectric material : ULTEM1000)
Propagation Delay	: 70ps (Dielectric material : ULTEM1000)

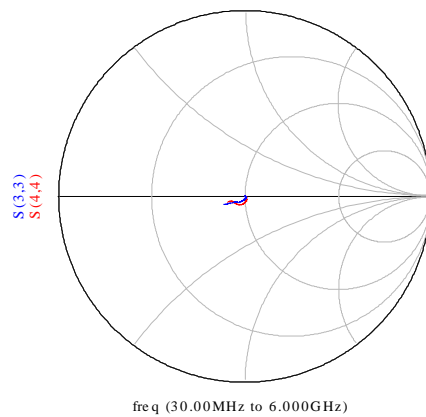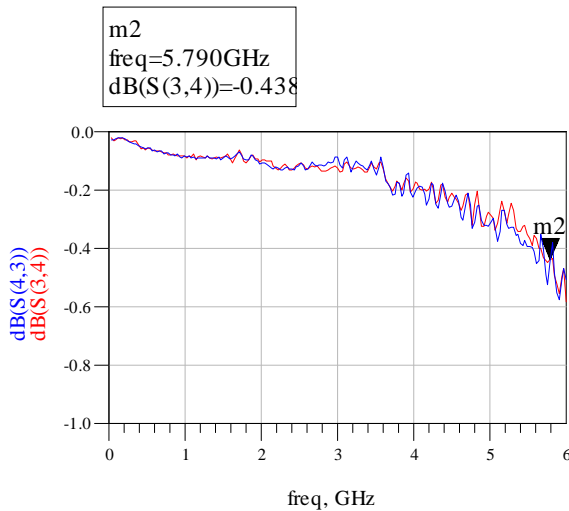

- S-parameter -

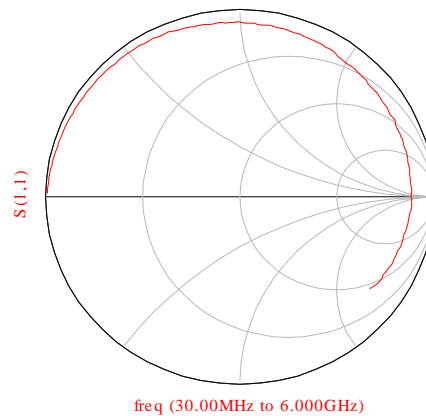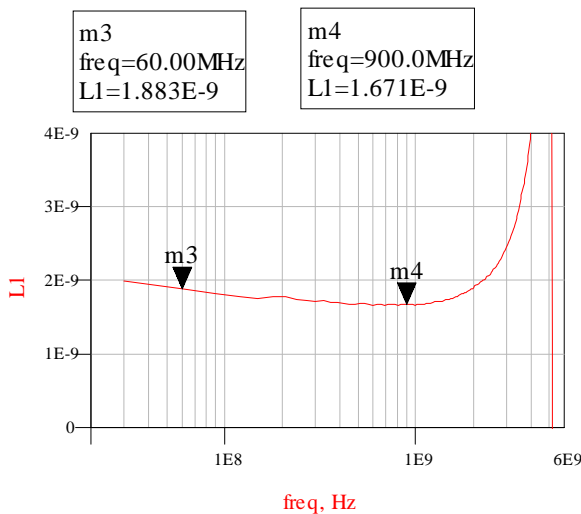

- Inductance for Leeno pin-

### HEAD OFFICE

1547-3, Songjung-Dong, Gangseo-Gu, Busan, Korea  
 TEL : +82-51-831-3232 +82-51-831-5897(Overseas Dept)  
 FAX: +82-51-831-3233 <http://www.leeno.co.kr>