DB404CAR-R1

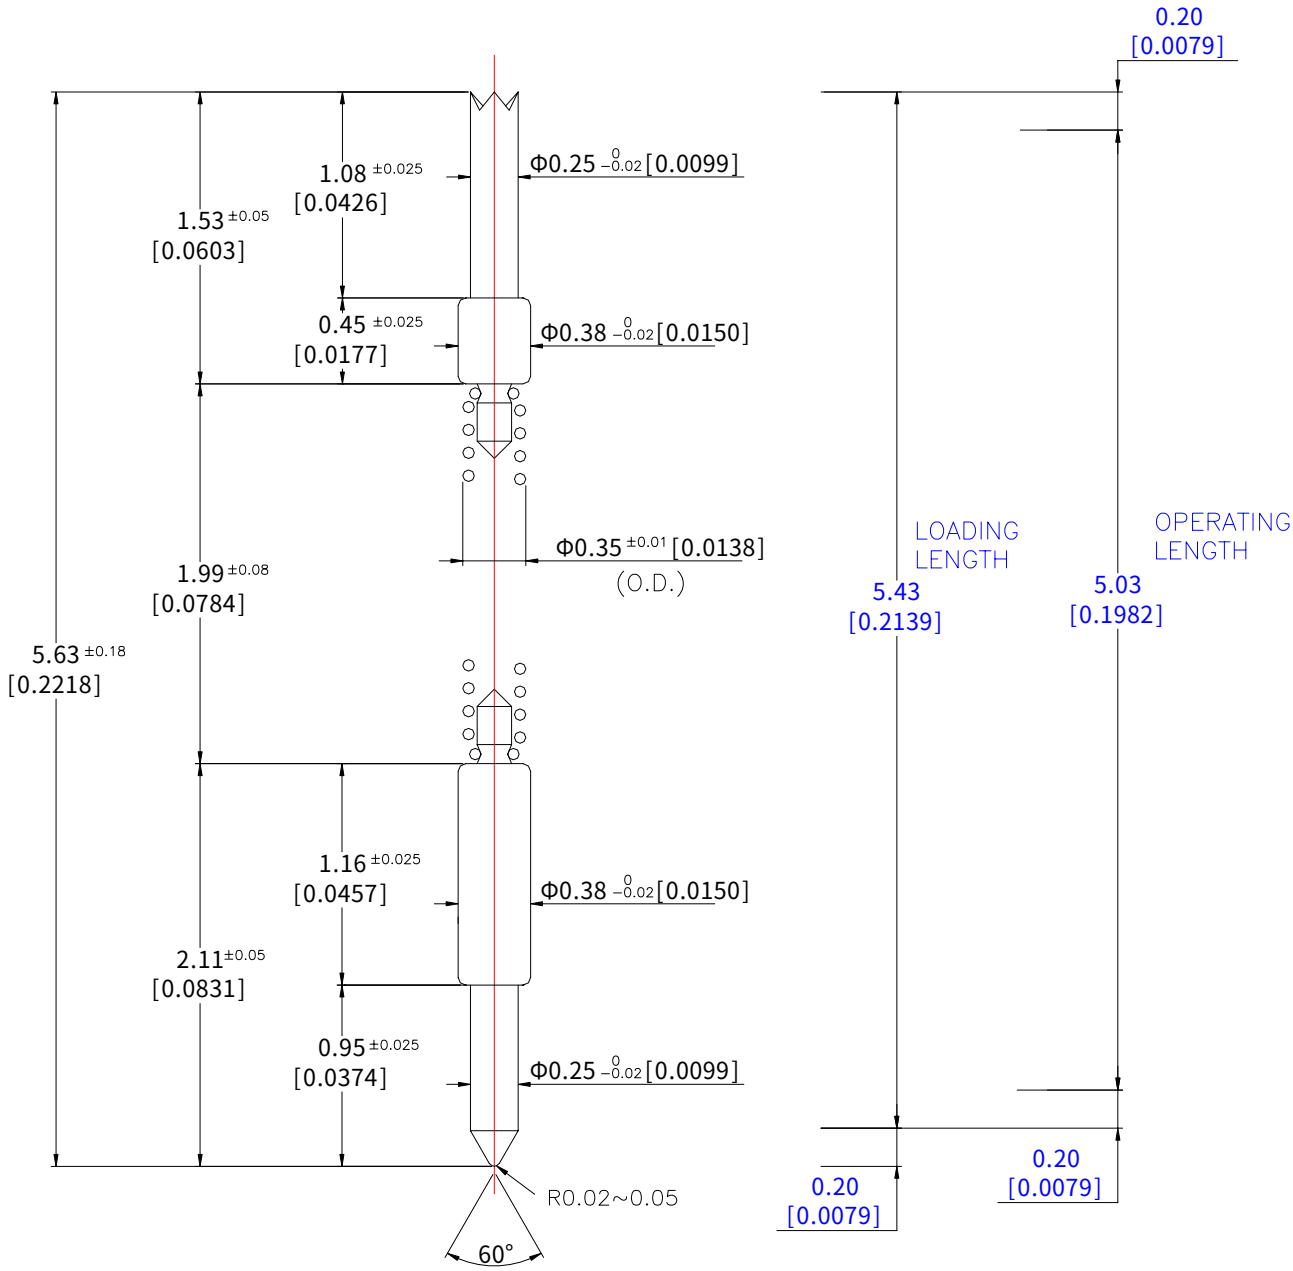

Unit : Millimeter[inch]

Spring force

4.0g(0.141oz) at initial travel
10.0g(0.353oz) at 0.40mm(0.0157) recommended travel
13.5g(0.476oz) at 0.63mm(0.0248) full travel

Material & Finish

Plunger	Hardened Beryllium copper	/ Gold Plated
Spring	Hardened Beryllium copper	/ Gold Plated

All right reserved. No part of this drawing may be copied, reproduced and transmitted in any forms or by any means without written permission of LEENO INDUSTRIAL INC.

HEAD OFFICE
1547-3, Songjung-Dong, Gangseo-Gu, Busan, Korea
TEL : +82-51-831-3232 +82-51-831-5897(Overseas Dept)
FAX: +82-51-831-3233 **http://www.leeno.co.kr**