


0.022(0.55) Test Centers G030 Series



unit:inch(mm)

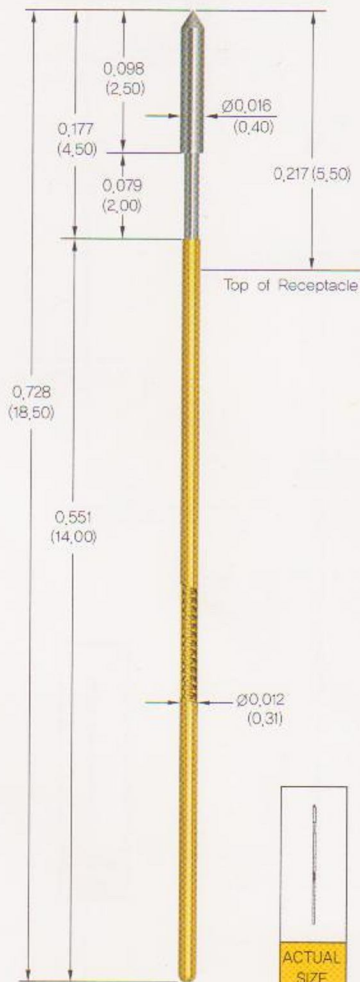

Actual Shape



Probe Specifications

Electrical(Static Conditions)

Current Rating : 0.5amps Continuous

Probe Resistance : Less than 150m Ω

Materials and Finishes

Plunger : Hardened Steel, Palladium Plated over Nickel
(Optional Gold Plated over Nickel)

Barrel : Phosphor Bronze, Gold Plated


Spring : Music Wire

Spring Force	±30%	oz(grams)
Preload	Recommended Travel 0.059(1.5mm)	Full Travel 0.079(2.0mm)
0.370(11)	0.952(27)	1.129(32)

Receptacle Specifications

Housing : Phosphor Bronze or Brass, Gold Plated

Mounting Hole Size : 0.018(0.45mm) drill is most commonly used

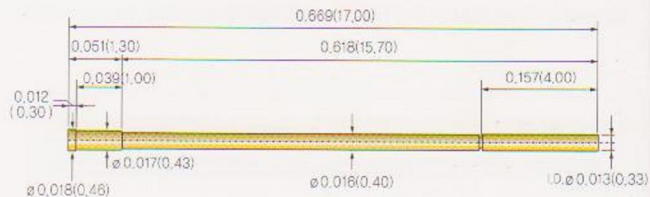

G030TW

No Termination Receptacle



G030SW

Preattached Wire Receptacle

