

0.025(0.65) Test Centers G040 Series



Probe Specifications

Electrical(Static Conditions)

Current Rating : 0.5amps Continuous
 Probe Resistance : Less than 100m Ω


Materials and Finishes

Plunger : Hardened Steel, Palladium Plated over Nickel
 (Optional Gold Plated over Nickel)
 Barrel : Phosphor Bronze, Gold Plated
 Spring : Music Wire

Spring Force	±30%	oz(grams)
Preload	Recommended Travel 0.051(1.3mm)	Full Travel 0.079(2.0mm)
0.635(18)	1.552(44)	2.046(58)

Receptacle Specifications

Housing : Phosphor Bronze or Brass, Gold Plated
 Mounting Hole Size : 0.022(0.55mm) drill is most commonly used

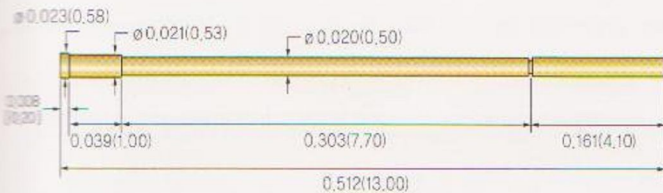

G040TW

No Termination Receptacle




G040SW

Preattached Wire Receptacle



unit: inch(mm)

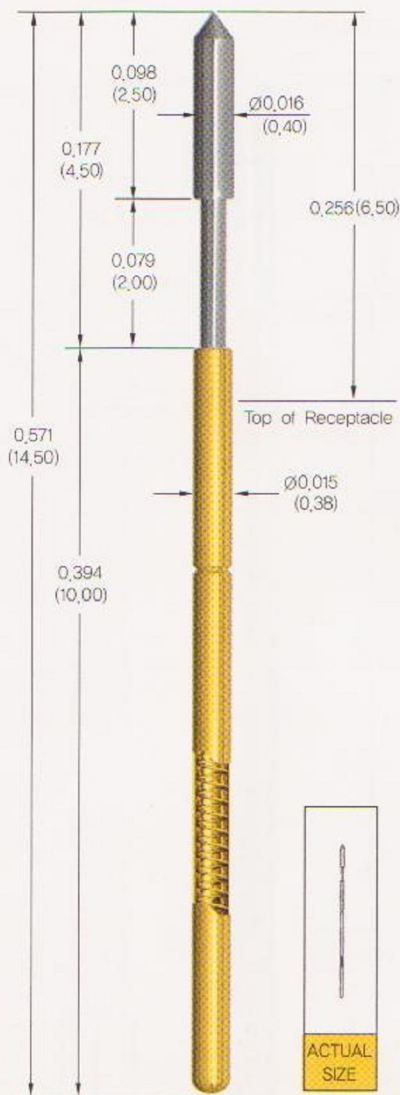

Actual Shape

