



LEENO·PIN

* Specifications to change without notice.
* Custom design probes are available on request.

0.030(0.80) Test Centers G042 Series



unit:inch(mm)

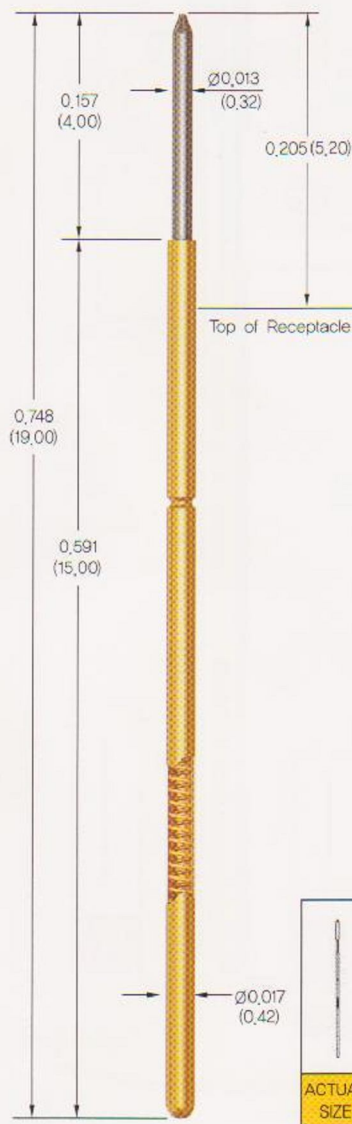

Probe Specifications

Electrical(Static Conditions)

Current Rating : 0.5amps Continuous
Probe Resistance : Less than 100m Ω


Materials and Finishes

Plunger : Hardened Steel, Palladium Plated over Nickel
(Optional Gold Plated over Nickel)
Barrel : Phosphor Bronze, Gold Plated
Spring : Music Wire

Spring Force	±30%	oz(grams)
Preload	Recommended Travel 0.051(1.3mm)	Full Travel 0.079(2.0mm)
0.705(20)	1.270(36)	1.516(43)

Receptacle Specifications

Housing : Phosphor Bronze or Brass, Gold Plated
Mounting Hole Size : 0.024(0.60mm) drill is most commonly used

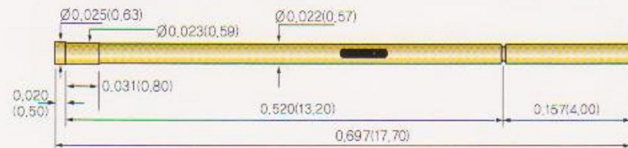

G042TW

No Termination Receptacle



G042SW

Preattached Wire Receptacle



Wire AWG 30