


0.030(0.80) Test Centers G050 Series

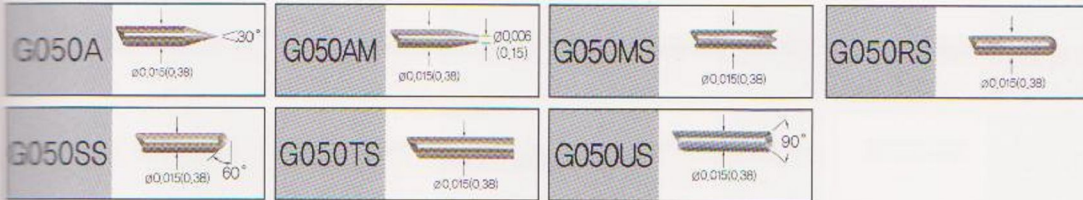

Probe Specifications

Electrical(Static Conditions)

Current Rating : 2amps Continuous
 Probe Resistance : Less than 50m Ω

Materials and Finishes

Plunger : Hardened Steel, Hardened Beryllium Copper, Palladium Plated over Nickel (Optional Gold Plated over Nickel)

Barrel : Phosphor Bronze, Gold Plated

Spring : Music Wire

Spring Force	±20%	oz(grams)
Preload	Recommended Travel 0.067(1.7mm)	Full Travel 0.098(2.5mm)
0.593(17)	1.418(40)	1.827(52)

Receptacle Specifications

Housing : Work Hardened Nickel Silver or Phosphor Bronze or Brass, Gold Plated

Mounting Hole Size : 0.028(0.70mm) drill is most commonly used



G050TW No Termination Receptacle



G050SW Preattached Wire Receptacle with Soldering



G050CW Preattached Wire Receptacle with Crimping



unit:inch(mm)

