


0.075(1.91) Test Centers G1003 Series

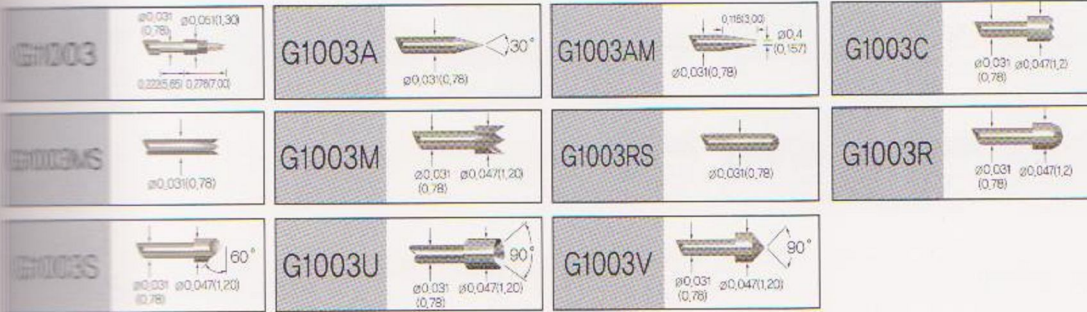

Probe Specifications

Electrical(Static Conditions)

Current Rating : 6amps Continuous
 Probe Resistance : Less than 30m Ω


Materials and Finishes

Plunger : Hardened Beryllium Copper, Palladium Plated over Nickel
 (Optional Gold Plated over Nickel)
 Barrel : Phosphor Bronze, Gold Plated Spring : Music Wire

Spring Force	$\pm 20\%$	oz(grams)
Preload	Recommended Travel 0.161(4.1mm)	Full Travel 0.244(6.2mm)
1,765(50)	3.707(105)	4.942(140)

Receptacle Specifications

Mounting : Work Hardened Nickel Silver, Nickel Plated
 Square Post : Brass, Gold Plated
 Mounting Hole Size : 0.051(1.30mm) drill is most commonly used

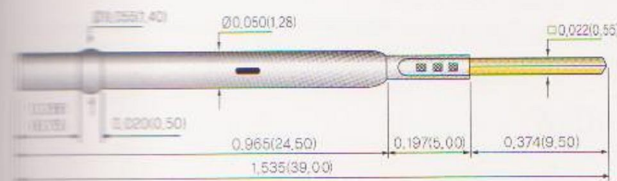

G1003W Wire-Wrap Receptacle



G1003SW Solder Cup Receptacle



G1003TW Crimp Style Receptacle

