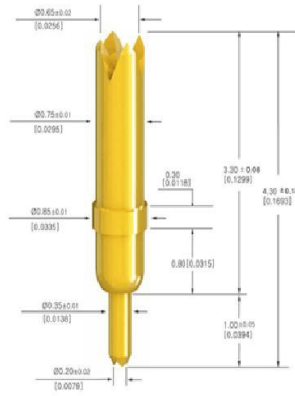


**GX276AMAM-D****Mechanical Spec.**

- Spring Force : 32.6g(1.149oz) @ 0.80mm(.0314)
- Recommended Travel : 0.80mm(.0314)
- Full Travel : 1.00mm(.0393)
- Material : Plunger - Hardened BeCu / Au plated  
Barrel - Hardened BeCu / Au plated  
Spring - Music Wire / Au plated  
Terminal - Hardened BeCu / Au plated

**Electrical Spec.**

- Current Rating : 4.0A Continuous
- Probe Resistance : Less than 30mohm
- Self Inductance : 0.75nH
- Bandwidth : 31.17GHz@-3.0dB
- Capacitance : 0.36pF
- Propagation Delay : 39.08ps