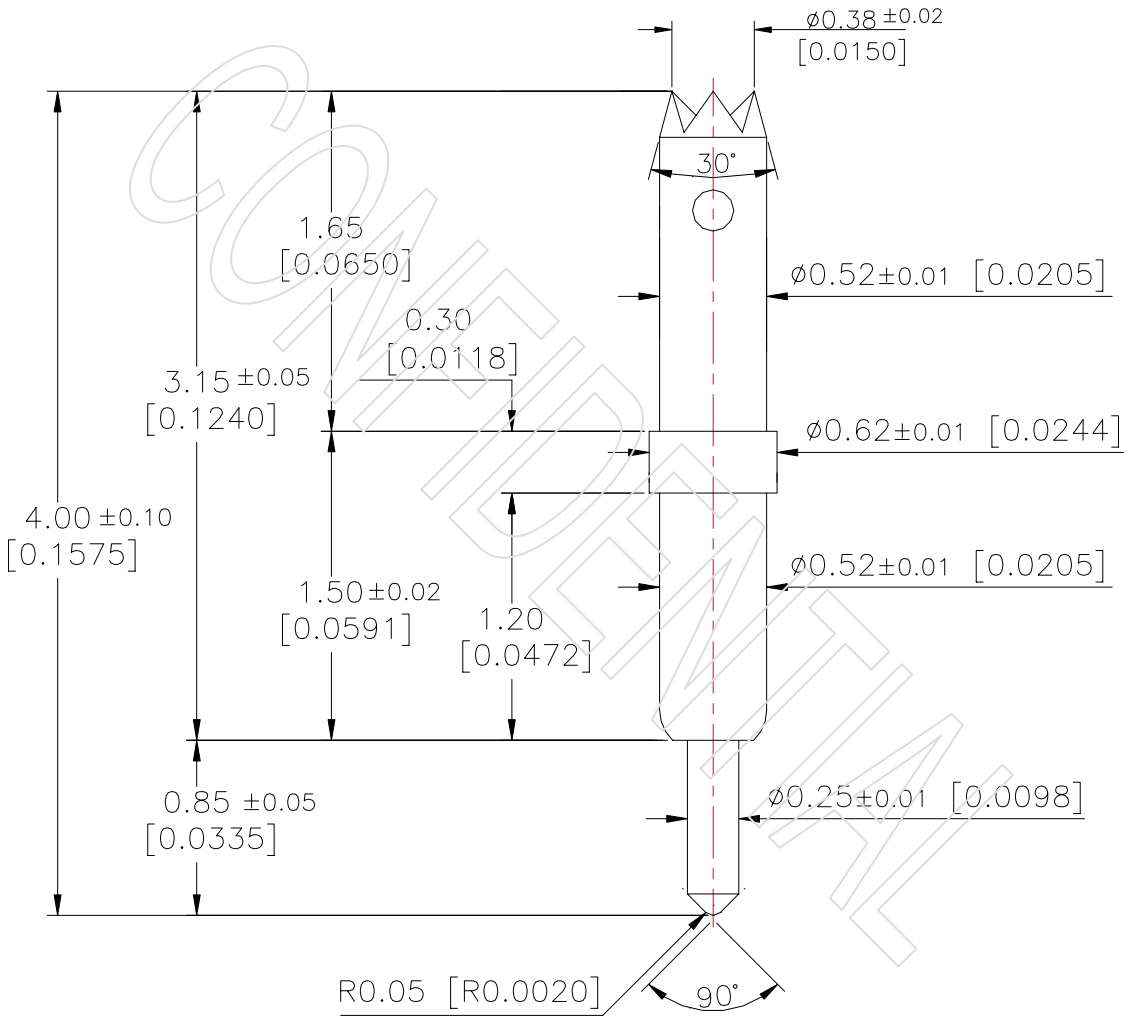

Unit : Millimeter[inch]

Pointing accuracy : ± 0.05 mm

Spring force

12.9g(0.455oz) at initial travel
35.0g(1.235oz) at 0.60mm(0.0236) recommended travel
44.3g(1.563oz) at 0.85mm(0.0334) full travel

Material & Finish

Plunger	Hardened Beryllium copper	/ Gold Plated
Barrel	Hardened Beryllium copper	/ Gold Plated
Spring	Music Wire	/ Gold Plated

All right reserved. No part of this drawing may be copied, reproduced and transmitted in any forms or by any means without written permission of LEENO INDUSTRIAL INC.

HEAD OFFICE
1547-3, Songjung-Dong, Gangseo-Gu, Busan, Korea
TEL : +82-51-831-3232 +82-51-831-5897(Overseas Dept)
FAX: +82-51-831-3233 **http://www.leeno.co.kr**