


# 0.050 inch (1.27mm) Test Centers

LEENO PIN MODEL NO.



Standard Probe      Test Center      Basic Spring Force (ounces)      Tip No. (S : Steel, None : BeCu)

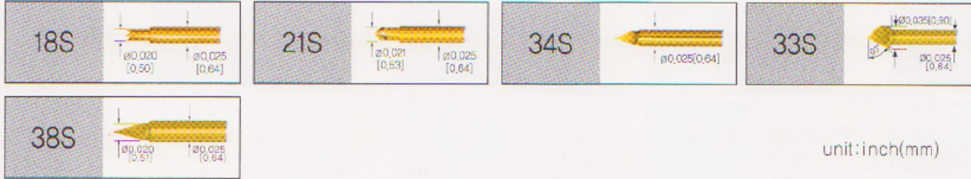

## Probe Specifications

### Electrical(Static Conditions)

Current Rating : 3amps Continuous  
 Probe Resistance : Less than 50m Ω


### Materials and Finishes

Plunger - Hardened Steel / Gold Plated  
 Barrel - Phosper Bronze / Nickel Plated  
 Spring - Music Wire

Spring Force No.	Preload	Recommended Travel 0.1665 inch 4.23mm	Full Travel 0.2500 inch 6.35mm
05	2.5 oz.(65g)	5.0 oz.(145g)	6.2 oz.(175g)
07	3.1 oz.(85g)	7.0 oz.(195g)	8.7 oz.(245g)

### RCR50TW

Crimp Style Receptacle      Mounting Hole Dia :  
**Material : Brass / Nickel Plated**      0.038 / 0.039(0.965 / 0.991)

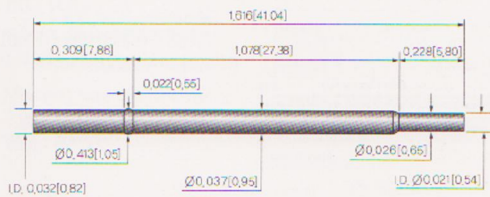

### RCR50W

Preattached Wire Receptacle      Wire : AWG30 (LENGTH : ab. 800mm)  
**Material : Brass / Nickel Plated**      Soldering

