


0.050 inch (1.27mm) Test Centers

LEENO PIN MODEL NO.

S P - T 5 0 - 1 8 S - 0 6 - 0 0

Standard Probe Test Center Basic Spring Force (ounces) Tip No. (S : Steel, None : BeCu)

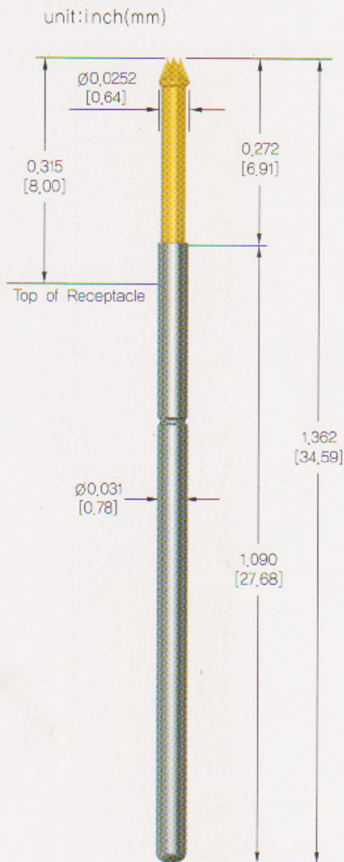

※ This probe to be used with DB-050 Double-ended receptacle

Probe Specifications

Electrical(Static Conditions)

Current Rating : 3amps Continuous
Probe Resistance : Less than 50m Ω

Materials and Finishes

Plunger - Hardened Steel / Gold Plated
Barrel - Phosper Bronze / Nickel Plated
Spring - Music Wire

Spring Force No.	Preload	Recommended Travel	Full Travel
04	1.8 oz.(52g)	0.1665 inch 4.23mm	0.2500 inch 6.35mm
06	1.8 oz.(52g)	5.6 oz.(160g)	7.6 oz.(215g)


RCT50TW

Crimp Style Receptacle

Material : Brass / Nickel Plated

Mounting Hole Dia.

0.038 / 0.039[0.965 / 0.991]

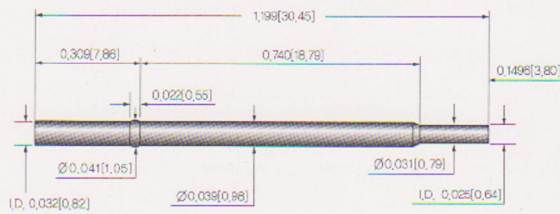

RCT50W

Preattached Wire Receptacle

Material : Brass / Nickel Plated

Wire : AWG30 (LENGTH : ab, 800mm)

Soldering

