
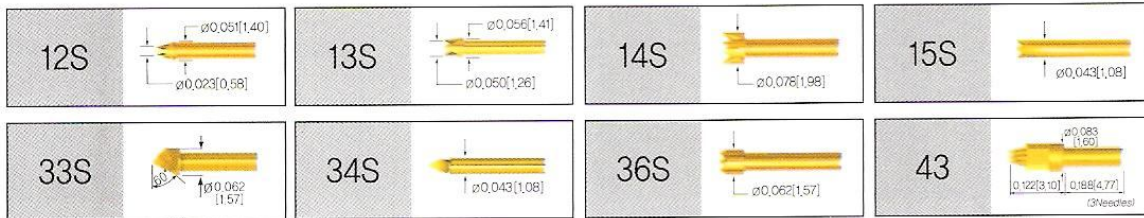


## 0.100 inch (2.54mm) Test Centers

### LEENO PIN MODEL NO.

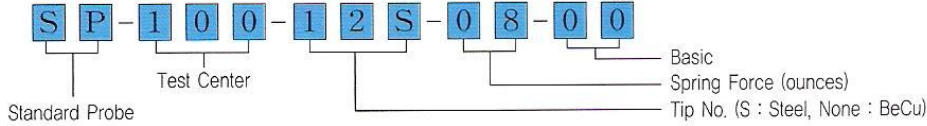

### Probe Specifications

#### Electrical(Static Conditions)

Current Rating : 6amps Continuous  
 Probe Resistance : Less than 50m Ω

#### Materials and Finishes


Plunger - Hardened Steel(or BeCu)/ Gold Plated  
 Barrel - Nickel Silver / Nickel Plated  
 Spring - Music Wire

Spring Force No.	Preload	Recommended Travel 0.1665 inch 4.23mm	Full Travel 0.2500 inch 6.35mm
04	1.1 oz.(31g)	4.1 oz.(118g)	5.7 oz.(162g)
06	1.8 oz.(52g)	6.8 oz.(195g)	9.4 oz.(267g)
08	3.0 oz.(86g)	8.0 oz.(229g)	10.5 oz.(300g)
10	3.6 oz.(102g)	10.2 oz.(290g)	13.7 oz.(388g)

### RC100TW

Crimp Style Receptacle  
**: Nickel Silver / No Finish**

Mounting Hole Dia. :  
 0.067 / 0.069 [1.70 / 1.75]  
 Wire : AWG30

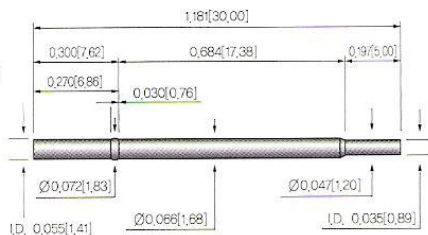

### RC100W

Wire-Wrap Receptacle : **Nickel Silver / No Finish**  
**Square Pin : Brass / Gold Plated**

